



General Specifications

Operating Temperature	32°F - 122°F (0°C - 50°C)
Operating Humidity	0 to 90% Relative Humidity (non-condensing)
Power Supply	PoE (IEEE 802.3af Class 3 Compliance) 9W
Dimensions	5.75" x 3.08" (146mm x 78mm)
Weight	0.8 lbs (0.365 kgs)
Mounting Options	Ceiling Flush Mount, Surface Mount (optional)
Vandal	IK10 rated, vandal proof housing with Tamper Alert
Certifications	UL, CUL, CE, RoHS, FCC, WEEE

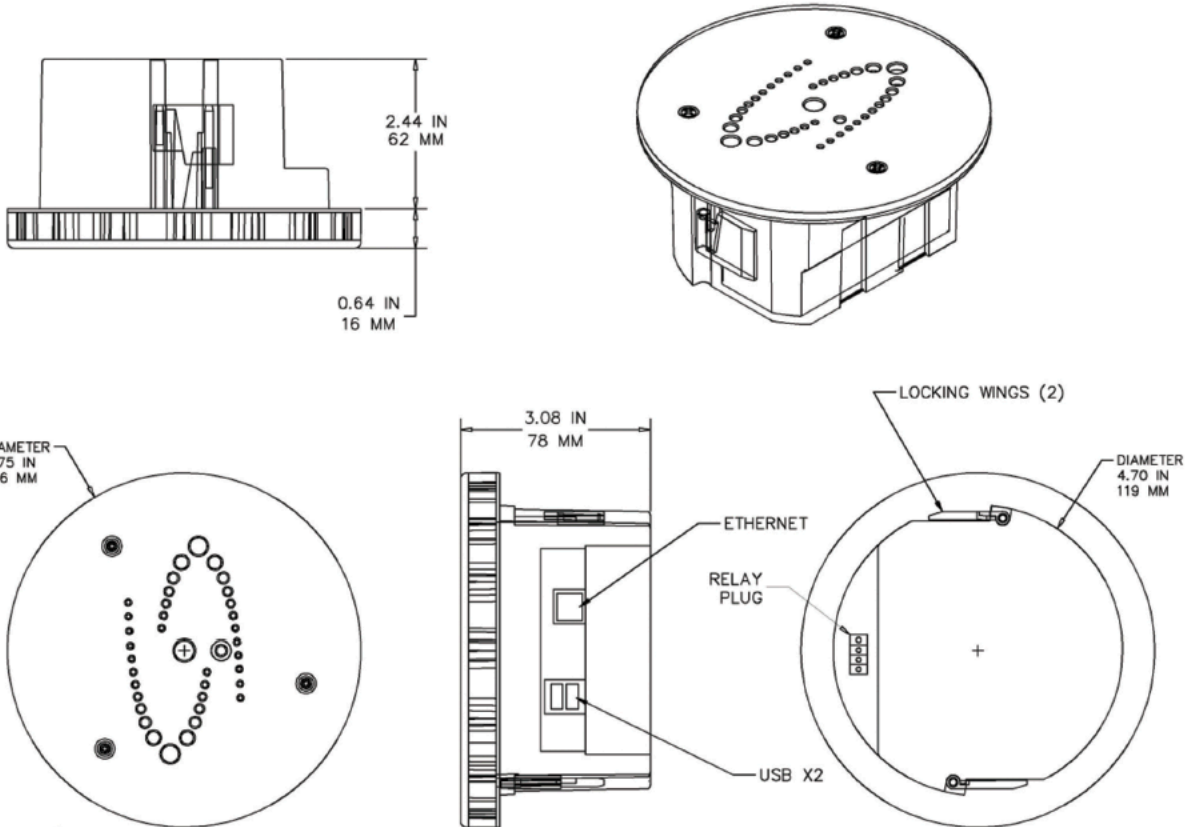

HALO IOT Smart Sensor contains a Class 1 Laser Product.

Interface Specifications

Live Display Resolution*	1024 x 768	<i>*Image display of sensor readings only.</i>
Frame Rate*	1 FPS	
Video Compression*	MJPEG	
Audio	MEMS Microphones (2) [Audio Analysis Only] No Recording of Live Stream	
Relays Outputs	2, Normally Open or Closed, 48VDC at 1 amp	
VMS Integrations	Milestone, Panasonic Video Insight, ExacQ Vision, Nx Witness, Hanwha Wave VMS, Luxriot Evo, DW Spectrum IPVMS, Ganz Control, Mirasys	
Other 3rd Party Integrations	Maxxess, Open Options, Vigilance, NULeds, Aruba HPE, PunchAlert	
Status Light	Alarm Condition, Multi-Color, Programmable	
Speaker	Alarm Condition, Pre-Recorded Files, Programmable	

Network Specifications

Ethernet	RJ-45 (10/100 Base-T)
Alarm Triggers	Particulates, Carbon Dioxide Equivalents, Total Volatile Organic Compounds, Carbon Monoxide, Ammonia, Temperature/Humidity, Light Level, Sound Levels, Tamper, Vape, Vape THC, Aggression
Protocols	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, RTP, RTSP, DHCP, ARP, Bonjour
Maximum Users Connections	Live MJPEG Stream, 8 Users

***All information is subject to change without notice.*